


CURVED TRACK

CTR30100-60

Curved Track	Flange	Web Depth	Thickness
--------------	--------	-----------	-----------

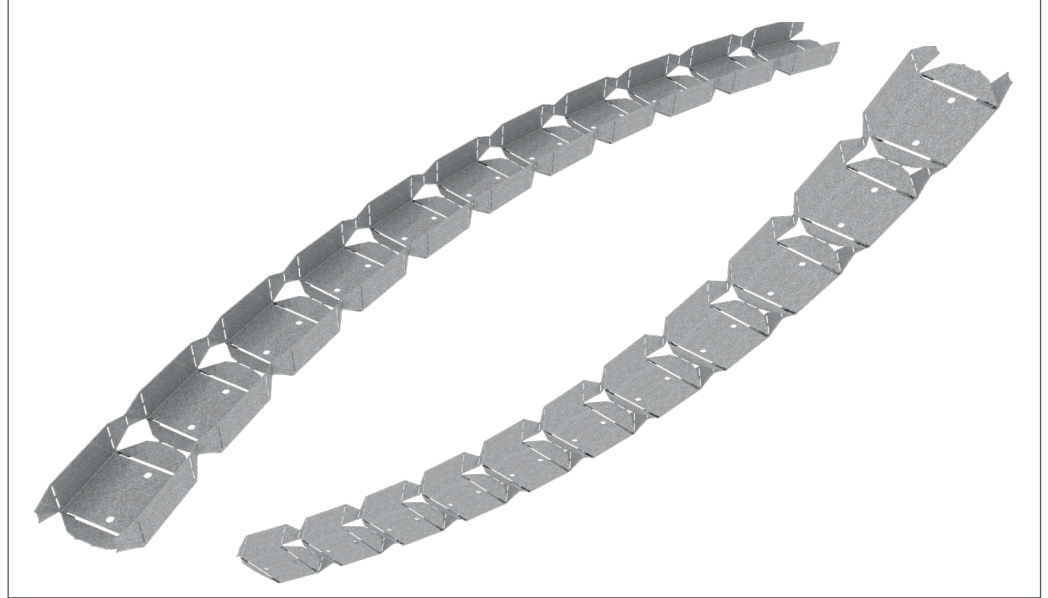

DESCRIPTION

Used in special framing applications as the top and bottom channels for securing wall studs at floor and ceiling junctions, used in framing application for constructing curved walls and ceilings domes. Curve radius can be adjustable on site as per the project requirement.

PRODUCT DATA

Length: 3,000 mm standard
Web depth: 64, 75, 92 and 100 mm
Flange: 30 / 30 mm
Thickness: 0.55-0.9 mm

RAW MATERIALS

- Galvanized steel G40-G90

STEEL GRADE

Yield stress, Fy 33 ksi Ultimate

RAW MATERIALS

- Curved Tracks are produced to meet or exceed ASTM C645 and C955
- Galvanized sheet steel meets or exceeds requirements of ASTM A-653
- For installation & storage information refer to ASTM C1007 & C754

GREEN BENEFITS

LEED Credit MR 2 - USG products are manufactured from cold-formed steel. Steel is 100% recyclable, which helps divert debris from the waste stream.
 LEED Credit MR 4 - USG's steel products have a minimum of 25.5% postconsumer recycled content, and 6.8% pre-consumer.

REFERENCES

For further health and safety instructions, refer to the Safety Data Sheet (SDS) for this product, available from your USG Middle East sales office or **USGme.com**

Notice:

As we are involved in constant products development; this document information is subject to change without prior notice. Please always refer to **usgme.com** for the updated products information document.

©2022 Factory of USG Middle East LTD. Co. All rights reserved.