


THREADED ROD HANGERS

TR8 3		
Threaded Rod	Dia mm	Length m

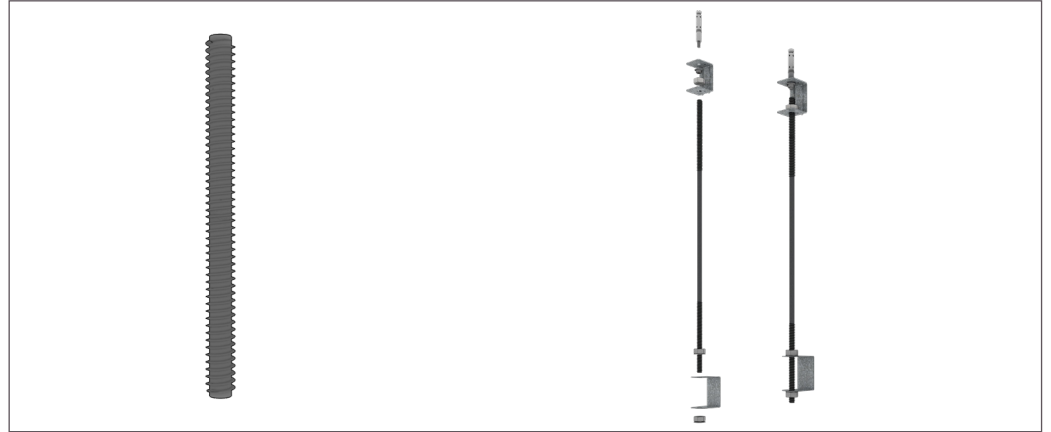

DESCRIPTION

The Threaded Rods are designed to be used in high tension due to being relatively long rods and being threaded. They are used as a ceiling suspension by being fixed to hard point on one end such as soffit of concrete slab/beam or steel structure with appropriate fasteners and ceiling frame on the other.

PRODUCT DATA

Hangers Diameter: 6mm (M6), 8mm (M8) and 10mm (M10)
Length*: Standard 3,000mm
**Other lengths are available upon request*

APPLICATIONS

6mm: Conventional drywall ceiling
8mm: Ceiling mass barrier
10mm: Special ceiling application

RAW MATERIALS

Carbon Steel
 Surface Finishing = Zinc plated
 Corrosion protection = 48 hours salt spray test

STEEL GRADE

G43A Min Yield Strength 210Mpa; Min T ensile Strength 320

ASTM & CODE STANDARDS

- Rod ASTM-A449 hot dip galvanized

GREEN BENEFITS

LEED Credit MR 2 - USG products are manufactured from cold-formed steel. Steel is 100% recyclable, which helps divert debris from the waste stream.
 LEED Credit MR 4 - USG's steel products have a minimum of 25.5% post-consumer recycled content, and 6.8% pre-consumer.

REFERENCES

For further health and safety instructions, refer to the Safety Data Sheet (SDS) for this product, available from your USG Middle East sales office or **USGme.com**

Notice:

As we are involved in constant products development; this document information is subject to change without prior notice. Please always refer to **usgme.com** for the updated products information document.

©2022 Factory of USG Middle East LTD. Co. All rights reserved.