
J-RUNNER SHAFTWALL FRAMING SYSTEMS



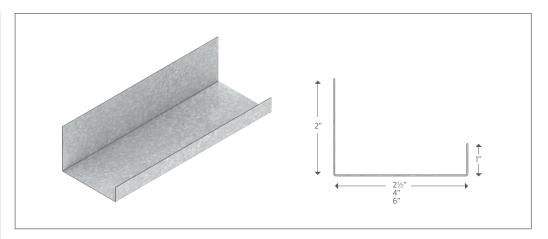

DESCRIPTION

Used to construct elevator shafts, mechanical shafts, stair shafts, services risers, air return shafts and horizontal shaft wall ceiling.

MATERIAL PROPERTIES

Yield stress, Fy 33 ksi Ultimate, with G40-G90 Zinc coating

ASTM & CODE STANDARDS

- Shaftwall Studs are produced to meet or exceed ASTM C645 and C955
- Galvanized sheet steel meets or exceeds requirements of ASTM A-653
- For installation & storage information refer to ASTM C1007 & C754

SECTION & MATERIAL PROPERTIES

									Steel Mechanical Properties		
Туре	Thickness (mm)	J-Runner Flange (mm)	J-Runner Depth (mm)	Section Area (mm²)	Centroid (mm)	Moment of inertia(Ixx) (mm ⁴)	Section Modulus (Sx)(mm³)	Radius of Gyration (mm)	Yield strength N/mm²	Tensile strength N/mm²	Elongation (%)
J Runner	0.60	25 / 50	64	82.2	37.70	55,617.00	2,115.00	26.01	297-308	366-372	29-30
	0.80	25 / 50		109.6	37.68	73,801.00	2,804.00	25.95	297-308	366-372	30-31
	0.90	25 / 50		123.3	37.67	82,827.00	3,146.00	25.92	297-308	366-372	30-31
	0.60	25 / 50	100	105	58.16	163,287.00	3,724.00	39.43	297-308	366-372	29-30
	0.80	25 / 50		140	58.15	217,139.00	4,951.00	39.38	297-308	366-372	30-31
	0.90	25 / 50		157.5	58.14	243,957.00	5,562.00	39.36	297-308	366-372	30-31
	0.60	25 / 50	150	135	84.40	423,997.00	6,266.00	56.04	297-308	366-372	29-30
	0.80	25 / 50		180	84.32	564,456.00	8,340.00	56.00	297-308	366-372	30-31
	0.90	25 / 50		202.5	84.32	634,523.00	9,375.00	55.98	297-308	366-372	30-31

GREEN BENEFITS AND RECYCLED CONTENT

LEED Credit MR 2 – USG products are manufactured from cold formed steel. Steel is 100% recyclable, which helps divert debris from the waste stream.

LEED Credit MR 4 – USG's steel products have a minimum of 25.5% post-consumer recycled content, and 6.8% pre-consumer.

REFERENCES

Notice:

As we are involved in constant products development; this document information is subject to change without prior notice. Please always refer to usgme.com for the updated products information document.

©2022 Factory of USG Middle East LTD. Co. All rights reserved.



For further health and safety instructions, refer to the Safety Data Sheet (SDS) for this product, available from your USG Middle East sales office or **USGme.com**

